

MANUAL STRAPPING TOOL WITH SEAL FOR PLASTIC STRAP P.P. / P.E.T. FLAT SURFACES

TECHNICAL DATA / APPLICATIONS :

Low cost manual strapping tool easy to use and set. Reliable to use in light industrial applications. The tool is standard on 13mm (1/2") strap size not modifiable.

Package type	Flat (min. length 200mm- 8")
Strap quality	PP / PET
Strap Width	From 11mm up to 13mm (0.43"—0.51")
Strap thickness	From 0,4mm up to 0,9mm (0.016" - 0.035")
Max. tension / Gear ratio	3000N / Around 1: 15
Joint type	With seal
Seal type	ORP type
weight	Around 2,7 Kg
Order code IMPA 13	111.130.040

- * EASY TO USE
- * MODER DESIGN
- * LIGHT AND COMPACT
- * ERGONOMIC



MANUAL STRAPPING TOOL WITH SEAL FOR PLASTIC STRAP P.P. / P.E.T. FLAT SURFACES

TECHNICAL DATA / APPLICATIONS :

Low cost manual strapping tool easy to use and set. Reliable to use in light industrial applications. The tool is standard on 16mm (5/8") strap size not modifiable.

Package type	Flat (min. length 200mm- 8")
Strap quality	PP / PET
Strap Width	From 15mm up to 16mm (0.59"—0.63")
Strap thickness	From 0,4mm up to 0,9mm (0.016"- 0.035")
Max. tension / Gear ratio	3000N / Around 1: 15
Joint type	With seal
Seal type	ORP type
weight	Around 3.9 Kg
Order code IMPA 16	112.160.040

- * EASY TO USE
- * MODER DESIGN
- * LIGHT AND COMPACT
- * ERGONOMIC



IMPA 13(1/2")–16(5/8")

- EASY ADJUSTMENT AND ACCES TO CLEAN AND TO PERFORM MAINTENANCE



- * MECHANICAL INDUSTRY
- * PAPER AND CARTON INDUSTRY
- * PACKAGING PRODUCE

TURN THIS SCREW TO ADJUST THE CUTTERS

TYPICAL APPICATIONS



INSERT THE SEAL




INSERT THE LOWER STRAP




INSERT THE UPPER STRAP



TENSIONING

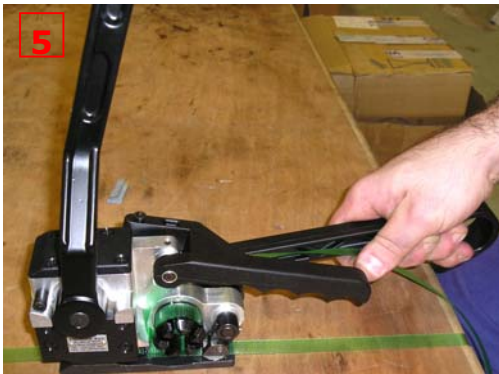

SEALING

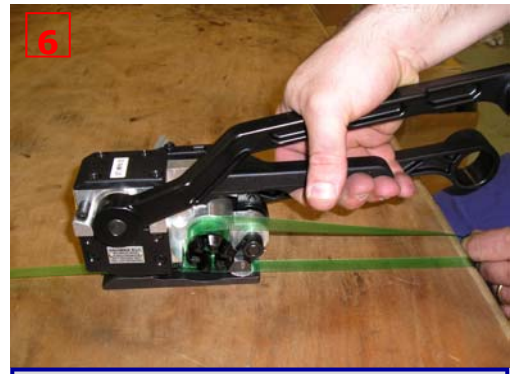

CUTTING STRAP – OPEN TOOL

ALL SPECIFICATIONS ARE CORRECT AT TIME OF PRINT, ARE FOR GUIDANCE PURPOSE ONLY AND SUBJECT TO CHANGE WITHOUT PRIOR NOTICE –10/04