



### PNEUMATIC STRAPPING TOOL WITH FRICTION WELD SEAL FOR PLASTIC PET STRAP — FLAT AND ROUND SURFACES

#### TECHNICAL DATA / APPLICATIONS :

Powerful, compact and easy to use strapping tool for heavy-duty industrial applications especially with high quality PET Polyester strapping is used and high tension is required. Available standard in one strap size: 32 mm. (1 1/4").

Package type	Flat, round surface (min. diam. 700mm—28")
Strap type	PET
Strap width	32 mm (1 1/4")
Strap thickness	From 0.8mm up to 1.30mm / 0.031" - 0.051"
Max. Tension	6000 N — 1350 lbs
Air pressure and consumption	From 5,5 up to 6,5 bar MAX / 12 l/s ( 14 l/s welding )
Max. Tension speed	Around 6 mt/min
Joint type	Friction weld seal
Weight	Around 5,6 Kg / 12 lbs
Order code Poli HT 32	110.320.630

- ERGONOMIC
- MODERN DESIGN
- COMPACT AND LIGHT
- NEW BOSCH MOTORS
- ONE-PIECE STRAP INSERTION
- EASY TOOL REMOVAL

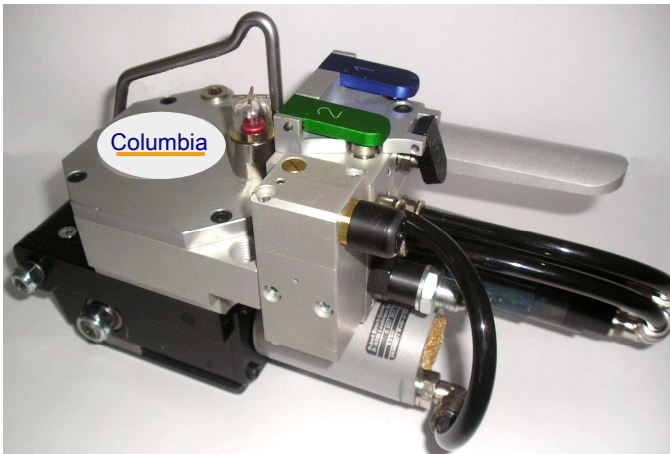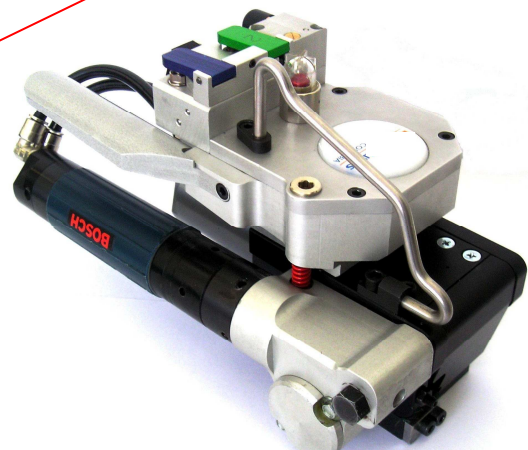

- HIGH STRAP TENSIONING
- ON REQUEST UPPER AIR CONNECTION CONFIGURATION



**- EASY AND FAST ADJUSTMENTS**

**WELDING TIMER  
ADJUSTMENT SCREW**

**LEVER 2— WELDING AND CUTTING  
(GREEN):  
PUSH TO START WELDING AND CUTTING**

**LEVER 1—TENSION (BLUE):  
HOLD IT PUSHED UNTIL THE  
RIGHT TENSION VALUE**

**LEVER 3- RELEASE (BLACK):  
WHEN THE PRESSURE  
INDICATOR IS DOWN, HOLD  
IT PUSHED UNTIL THE STRAP  
IS RELEASED**

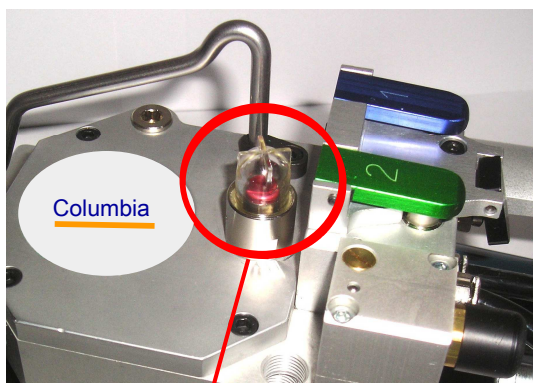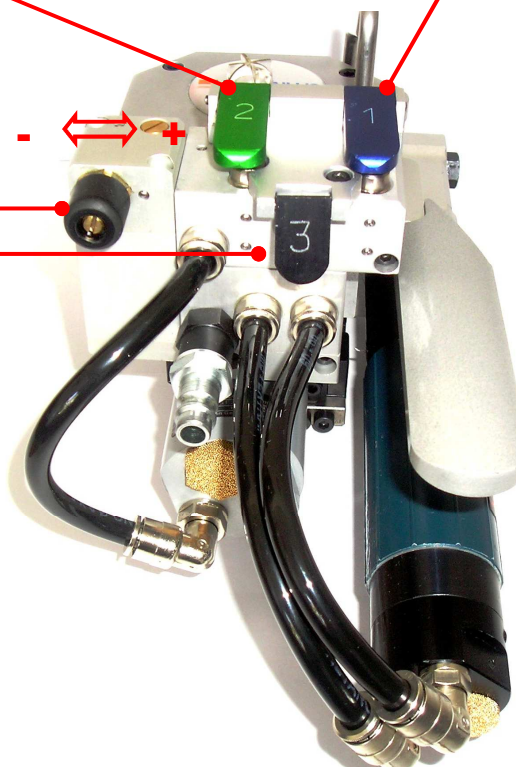


**NEW WELDING TIMING  
INDICATOR**

**TURN THIS SCREW TO ADJUST THE MOTOR  
POWER**



**HT**

- CONFIGURATIONS ON REQUEST

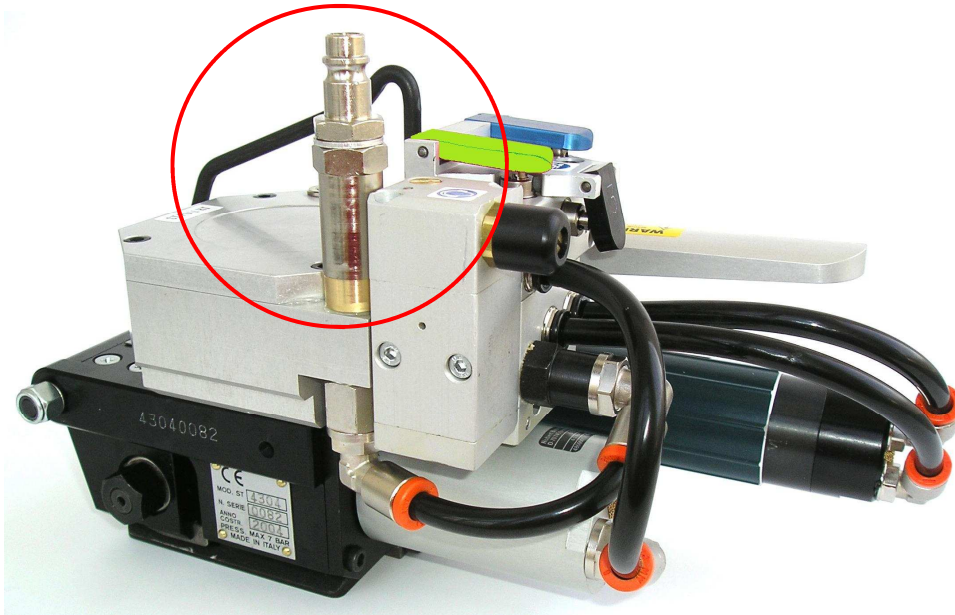

**AN UPPER AIR CONNECTION IS PARTICULARLY USEFUL WHEN USED WITH A SPRING BALANCER. THIS OPTION IS AVAILABLE BUT MUST BE INDICATED WHEN ORDERING**

### ACCESSORIES

- **FILTER + LUBRIFICATOR + PRESSURE ADJ GROUP CODE 601.010.830**
- **SPIRAL LONG PIPE MT.15 WITH AIR CONNECTORS ON TIPS CODE 281.218.300**
- **BALANCER 5-8,5 KG CODE 605.080.090**

### OPTIONALS

- **SUSPENSION BRACKET KIT 3 POSITIONS CODE 291.030.500**

