
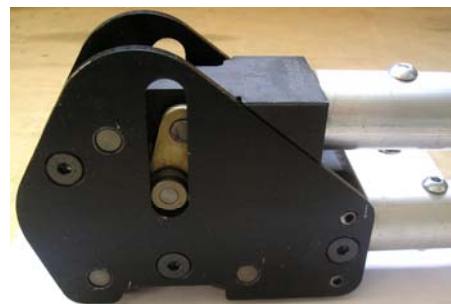
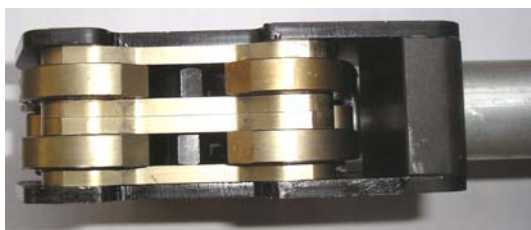


NEW HAND SEALER FOR STEEL STRAP WITH DOUBLE NOTCH — FLAT AND ROUND SURFACE— TO BE USED IN COMBINATION WITH MODEL STTR / STTMR TENSIONERS

*TECHNICAL DATA / APPLICATIONS :*

<b>Package type</b>	Flat, round and irregular surfaces
<b>Strap quality</b>	Bright—blue Rmax=850 N/mm2
<b>Strap Width</b>	From 25mm to 32mm (1" - 1-1/4")
<b>Strap thickness</b>	From 0.6mm up to 1,1 mm (0.024"—0.044")
<b>weight</b>	2,8 Kg
<b>Joint type</b>	Seal — double notch
<b>Seal type</b>	Overlap min. 45mm lenght (1.75")
<b>Order codes SDN25 ; SDN32</b>	130.250.040 ; 130.320.040

- \* EASY TO USE
- \* MODERN DESIGN
- \* COMPACT AND LIGHT

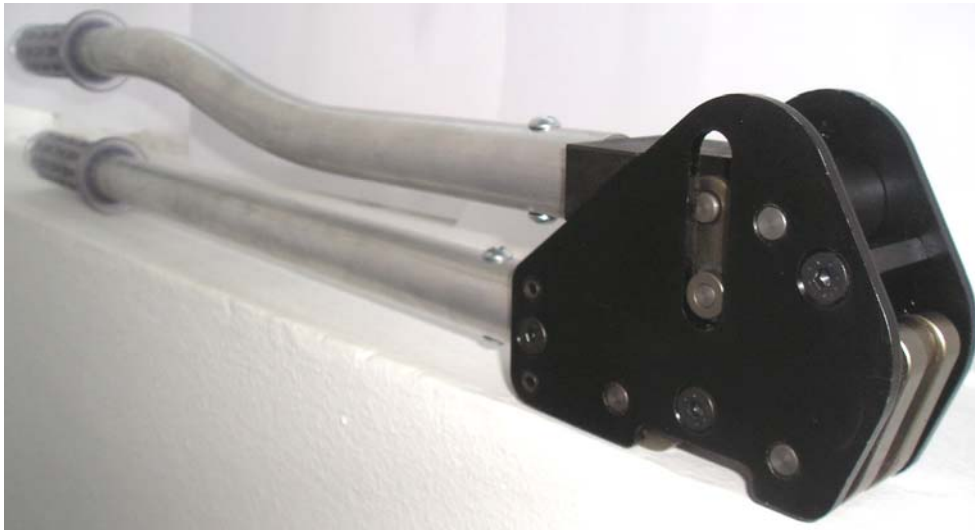

# SIAT

by Linkx Systems

## SDN 25(1")–32(1-1/4") DOUBLE NOTCH

- NO ADJUSTING TO USE  
- DOUBLE NOTCH



TYPICAL APPLICATIONS

SAMPLE OF COMBINATION STPM + STTMR



SAMPLE OF COMBINATION STPM + STTR



- \* MECHANICAL INDUSTRIES
- \* CARPENTRY
- \* IRON BANDS, COILS, PIPES
- \* TIMBER

ALL SPECIFICATIONS ARE CORRECT AT TIME OF PRINT, ARE FOR GUIDANCE PURPOSE ONLY AND SUBJECT TO CHANGE WITHOUT PRIOR NOTICE —12-07

Linkx Systems Ltd, Anson House, Ellough, Beccles, NR34 7TJ  
Tel: +44(0)1502 713777 [www.siat.co.uk](http://www.siat.co.uk) / [www.linkx.co.uk](http://www.linkx.co.uk)