

### PNEUMATIC STRAPPING TOOL WITH SEAL FOR STEEL STRAP FLAT AND ROUND SURFACE

#### TECHNICAL DATA / APPLICATIONS :

Powerfull and reliable strapping tool for use in industrial heavy duty applications. Available in three different sizes of strap, 19mm(3/4"), 25mm(1"), e 32mm(1-1/4") and two versions: 3 buttons model (STANDARD) and 2 buttons model (ON REQUEST)

Package type	Flat, round and irregular surfaces	
Strap quality	Bright—blue— high tensile	
Strap Width	From 19mm up to 32mm (3/4" - 1-1/4")	
Strap thickness Bright—blue	Rmax= 850 N/mm2	From 0,6mm up to 1mm (0.024"- 0.039")
Strap thickness high tensile	Rmax= 1100 N/mm2	From 0,63mm up to 0,8mm (0.025"- 0.031")
Max. Tension	9000 N	
Air pressure and consumption	From 5,5 up to 6,5 bar MAX / around 12 l/s	
Max. Tension speed	Around 6 mt/ min	
Joint type	Seal—double notches	
Seal type	Overlap (min. lenght 45mm – 1-3/4")	
Weight	Around 10 Kg	



\* EASY TO USE

\* MODERN DESIGN

\* RELIABLE



2 BUTTONS MODEL

NEWS:  
BOSCH MOTOR




3 BUTTONS MODEL

MODEL	ORDER CODE	
STSR 19 3 BUTTONS	102.190.130	STANDARD
STSR 25 3 BUTTONS	102.250.130	STANDARD
STSR 32 3 BUTTONS	102.320.130	STANDARD
STSR 19 2 BUTTONS	120.190.130	ON REQ.
STSR 25 2 BUTTONS	120.250.130	ON REQ.
STSR 32 2 BUTTONS	120.320.130	ON REQ.

## STSR 19(3/4")-25(1")-32(1-1/4")

- EASY AND FAST ADJUSTMENTS

- EAST ACCES TO CLEAN AND TO PERFORM MAINTENANCE

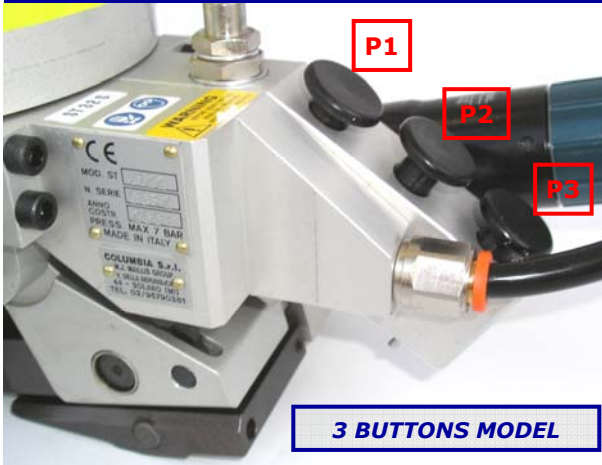


3 BUTTONS MODEL

### 3 BUTTONS MODEL:

**P1= PUSH TO OPEN THE TOOL TO INSERT STRAP**

**P2= HOLD BOTTOM PUSHED TO CLOSE THE TOOL AND STARTING TENSION CYCLE (IF RELEASED THE TENSION CYCLE WILL BE STOPPED)**

**P3= HOLD BOTTOM PUSHED UNTILL THE SEALING AND CUTTING CYCLE ARE COMPLETED**

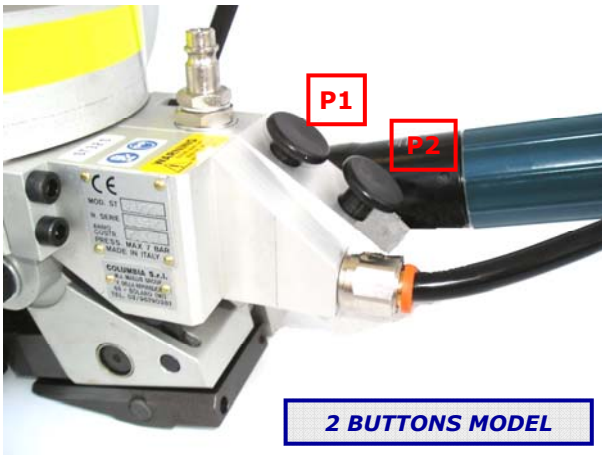

2 BUTTONS MODEL

### 2 BUTTONS MODEL:


**P1= PUSH TO CLOSE THE TOOL AND STARTING THE TENSION CYCLE (THE TENSION WILL ARRIVE UNTILL THE MAXIMUN VALUE)**

**P2= HOLD BOTTOM PUSHED UNTILL THE SEALING AND CUTTING CYCLE ARE COMPLETED, AUTOMATICLY AT THE END CYCLE THE TOOL WILL BE OPENED TO EXTRACT AND INSERT STRAP ( IF PUSHED DURING THE TENSION CYCLE WILL STOP IT)**

### SLIDING ROLLER



**TURN THIS SCREW TO ADJUST THE GAP BETWEEN FEEDWHEEL AND SLIDING ROLLER**

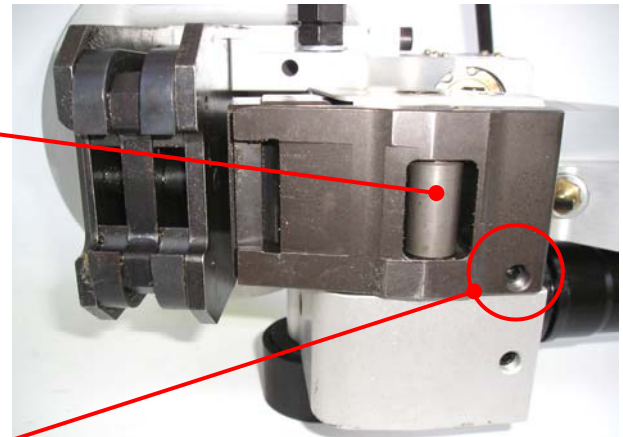


**TURN THIS SCREW TO ADJUST THE MOTOR POWER**



### TYPICAL APPLICATIONS

- \* MECHANICAL INDUSTRIES
- \* CARPENTRY
- \* BANDS, COILS, PROFILES, PIPES
- \* FOUNDRY
- \* WOOD
- \* METALLURGY

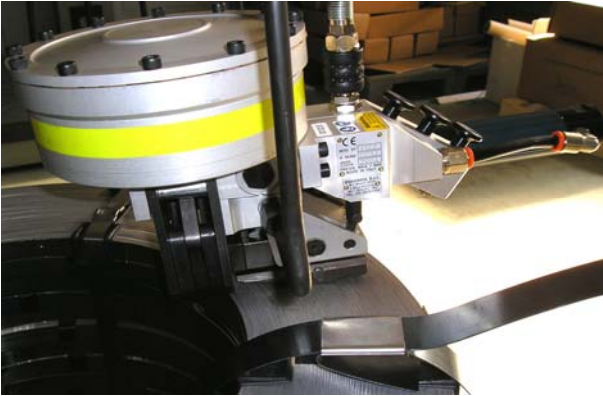

**3 BUTTONS  
MODEL USING  
SEQUENCE**



# SIAT

by Linkx Systems


## STSR 19(3/4")-25(1")-32(1-1/4")

### TYPICAL APPLICATIONS



- \* MECHANICAL INDUSTRIES
- \* CARPENTRY
- \* BANDS, COILS, PROFILES, PIPES
- \* FOUNDRY
- \* WOOD
- \* METALLURGY

**2 BUTTONS  
MODEL USING  
SEQUENCE**

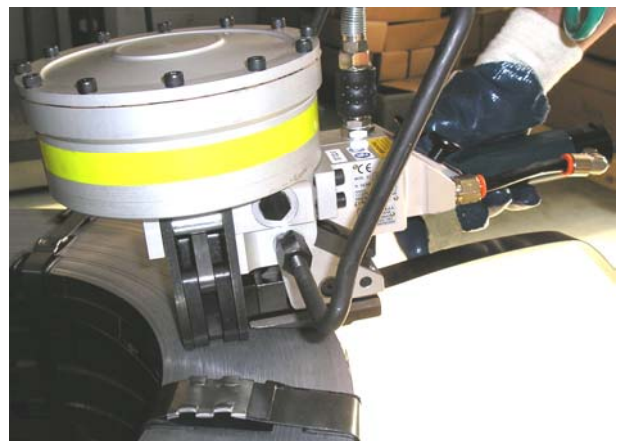

Linkx Systems Ltd, Anson House, Ellough, Beccles, NR34 7TJ  
Tel: +44(0)1502 713777 [www.siat.co.uk](http://www.siat.co.uk) / [www.linkx.co.uk](http://www.linkx.co.uk)

## STSR 19(3/4")-25(1")-32(1-1/4")

### ACCESSORIES

- **FILTER + LUBRIFICATOR + PRESSURE AIR ADJ GROUP CODE 601.010.830**
- **SPIRAL LONG PIPE MT.15 WITH AIR CONNECTORS ON TIPS CODE 281.218.300**
- **BALANCER 8/11 KG CODE 605.080.070**

### OPTIONALS

- **PINS JOINTED SPECIAL SUSPENSION BRACKET KIT CODE 281.018.800**



ALL SPECIFICATIONS ARE CORRECT AT TIME OF PRINT, ARE FOR GUIDANCE PURPOSE ONLY AND SUBJECT TO CHANGE WITHOUT PRIOR NOTICE -09/04

Linkx Systems Ltd, Anson House, Ellough, Beccles, NR34 7TJ  
Tel: +44(0)1502 713777 [www.siat.co.uk](http://www.siat.co.uk) / [www.linkx.co.uk](http://www.linkx.co.uk)